

Technical Data Sheet

intercoat series 700

thermosetting powder coating for outdoor use polyester
smooth gloss | smooth matt | fine texture | anodized effect | antique | chrome metallic

Product description

Intercoat 700 - premium series of bonded polyester paints for outdoor use.

Collection of premium powder coatings "BONDALUX", produced using bonding technology for outdoor use. Powder coatings produced using bonding technology have a number of advantages:

- Unique metallic effect
- Uniform and constant decorative properties
- Saving up to 30% powder
- Increased atmospheric resistance of the coating.

Typical application

Intercoat 700 is used for painting objects where good weather resistance and improved appearance are required. It has increased performance properties and rich color.

Product details

- Packages: carton with antistatic PE bag liner, 20 kg, 25 kg or Big Bag for approx. 500 kg, net
- Storage Stability: min 24 month from manufacture (see printed date on product label)
- Storage temperature: < 25°C
- Moisture: < 80%
- Specific Gravity (ISO 8130-2): smooth 1.50-1.75 g/cm³ depending on pigmentation
- Moisture content (ISO 8130-7): < 0.4%



Contact:

+372 655 1010
intercoat.ee
Email: info@intercoat.ee

Bank details:

WISE
BIC: TRWIBEB1XXX
IBAN: BE60 9676 9925 4370



- Fluidization (ISO 8130-5): good 120 - 140 points
- Particle size distribution (ISO 8130-13):
 - fine fraction up to 10 µm in size: < 6%
 - base fraction up to 32 µm in size: 25-45%
 - base fraction up to 32 µm in size: 25-45%

Gloss level

N/D* (visual comparison)

* Gloss level acc. to DIN EN ISO 2813/60° angle (doesn't apply to metallic effect powder coatings).

Test results

Checked under laboratory conditions on a chromated 0.8 mm thick aluminium test panel.

Test method	Test	Gloss	Matt	Fine	Anodized	Antique	Chrome
ISO 2360	film thickness recommended	60-80 µm	60-80 µm	70-90 µm	60-80 µm	100-150 µm	60-80 µm
ISO 2409	cross cut test/adhesion 1mm cutting distance	GT 0	GT 0	GT 0	GT 0	GT 0	GT 0
ISO 1519	mandrel bending test cracking of coating	≤10 mm	≤10 mm	≤10 mm	≤10 mm	≤32 mm	≤10 mm
ISO 3668	coating color, deviation	≤1	≤1	≤1	≤1	≤1	≤1
ISO 6272	ball impact test cracking of coating	No cracks	Minor cracks	Cracks	No cracks	Cracks	No cracks

Processing

Corona, Tribostatic*.

* Available upon inquire.

Color shades

Mainly RAL shades; also, special domestic shades on request*.

* Color of coating parameters other than indicated in the table can be agreed with the customer.



Contact:

+372 655 1010
intercoat.ee
Email: info@intercoat.ee

Bank details:

WISE
BIC: TRWIBEB1XXX
IBAN: BE60 9676 9925 4370



Pretreatments

Before the painting, the item should be adequately pretreated in accordance with surface type, final use and required performances. The following table can be used as starting point for the pretreatment choice. The surface shall be clean, dry and appear with a rough and dull profile.


Substrat	Indoor use	Outdoor use	Architecture
Aluminium	soil removal, chromate, chrome-free	chromate, chrome-free	chromate, chrome-free
Steel	soil removal, iron phosphate, zinc phosphate, sand-blasting	iron phosphate, zinc phosphate, sand-blasting	-
Zinc coated steel	acid attack, iron phosphate, chromate	acid attack, zinc phosphate, chromate	-

Oxides (rust) cleaning and de-greasing shall be carried out when the simplified process is used! The simplified pre-treatment does not ensure necessary protective properties and decreases the service life of the coating. Hot-dip galvanized steel requires additional mechanical processing (incision).

Cure parameters

Temperature and time combinations resulting in the optimal cross-linking of the coating.

Typical curing

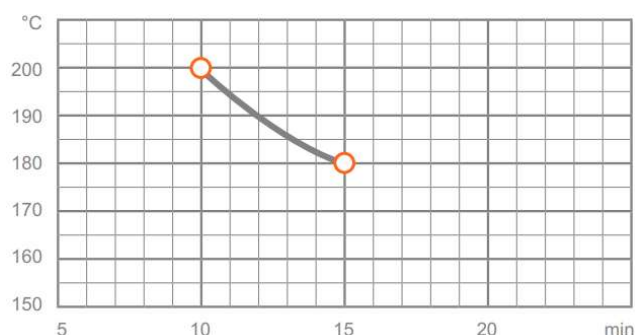

Please observe cure parameters closely since mechanical properties will develop before full cross-linking!

To obtain optimal stoving conditions you are recommended to carry out practical trials, adapted to the object in question and the stoving oven each time. Temperature conditions of curing for each powder are listed on the label. Our technical service department will be glad to advise you.

The curing mode schedule can be set by agreement with the consumer.

Our technical service department will be glad to advise you.



Contact:

+372 655 1010
intercoat.ee
Email: info@intercoat.ee

Bank details:

WISE
BIC: TRWIBEB1XXX
IBAN: BE60 9676 9925 4370



Note

The data is provided for informational purposes and is not exhaustive. Any purchaser using the product other than as specified in this data sheet assumes responsibility for the results obtained. As the manufacturer, we provide a more accurate description of the product, conditions of use and all related factors of the application process. Because direct control by us cannot be exercised over compliance with the above conditions, without further written agreement, we make no warranty and assume no liability for the use of the product and the results obtained.



Contact:

+372 655 1010
intercoat.ee
Email: info@intercoat.ee

Bank details:

WISE
BIC: TRWIBEB1XXX
IBAN: BE60 9676 9925 4370

